




UNI080059

**Stainless Steel
ANSI 150
Swing Type
Check (Non Return) Valve
Flanged
ASA 150**

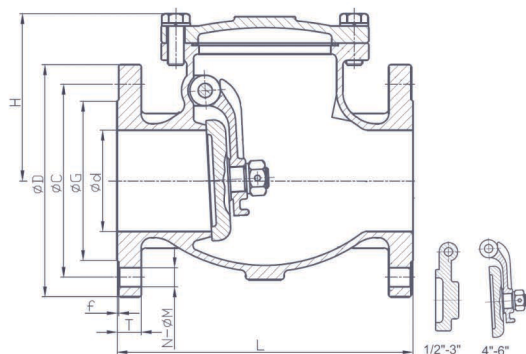

A robust stainless steel, swing type (flapper) check valve suitable for a wide range of applications.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

Features, Benefits & Approvals

- Suitable for various applications
- Stainless steel seat
- Bolted bonnet

Pressure & Temperature

- Maximum pressure:
Class 150 Rated
- Temperature range:
20 °C to 180 °C

d (DN)	25	40	50	65	80	100	150
L	135	165	203	216	241	292	356
H	64	75	97	111	120	162	203
D	108	127	152	178	191	229	279
C (PCD)	79	98	121	140	152	191	241
N ØM	4 x M16	4 x M16	4 x M16	4 x M16	4 x M16	4 x M16	4 x M19
G	51	73	92	105	127	157	216
f	2	2	2	2	2	2	3
t	16	16	18	18	20	20	22
Weight Kg	3.1	6.1	8.5	12.2	16.8	25.8	50.0

MATERIALS	
Body	Stainless Steel (CF8M)
Bonnet	Stainless Steel (CF8M)
Disc	Stainless Steel (CF8M)
Gasket	PTFE