




UNI150006

**Stainless Steel
Y Type Strainer
Flanged ANSI 150**

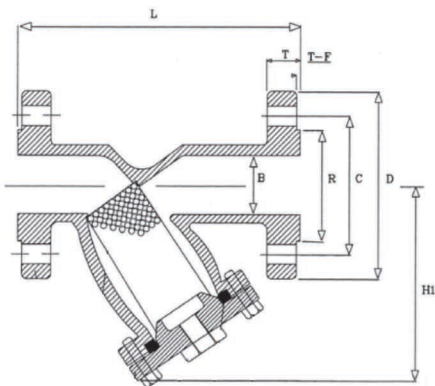

The UNI150006 stainless steel 'Y' type strainer with a stainless steel screen ideally suited for use in the water distribution, gas oil, steam and petrochemical applications to protect meters, pumps, valves and other pipeline equipment.

Approvals, Features & Benefits

Suitable for a wide range of duties

Y type for efficient straining

Easy to remove screen for cleaning

Drain plug

Pressure & Temperature

Maximum pressure:-

Class 150 Rated

Temperature range:-

-20°C to 450°C

See pressure/temperature chart below

SIZE	DN25	DN40	DN50	DN65	DN80	DN100	DN150
L	160	200	230	290	310	350	440
D	108	127	152	178	190	229	279
C	79.5	98.5	120.5	139.5	152.5	190.5	241.5
B	25	40	50	65	80	100	150
T	14	17	18	21	23	23	25
R	51	73	92	105	127	150	216
F	1	2	2	2	2	2	2
Drain Plug (BSPT)		½"	½"	½"	½"	½"	½"
Flange Bolt Holes	4 x 15	4 x 15	4 x 19	4 x 19	4 x 19	8 x 19	8 x 22
Mesh Perforation	1.5	2	2	2	2	2	2
Weight Kg	3.4	6.2	9	14.5	18.5	27	50

MATERIALS	
Body & Bonnet	Stainless Steel (A351-CF8M)
Screen & Drain Plug	Stainless Steel (316)
Gland Bolt	Stainless Steel (304)
Gasket	PTFE

Pressure/Temperature

