




UNI09ZZVP

CAST Steel Self Operated Micro Pressure Regulator Flanged PN16

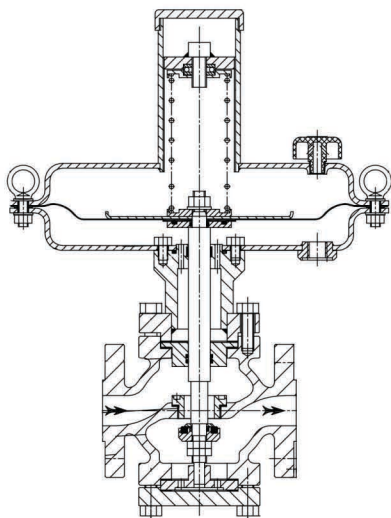

ZZVP Self Operated Micro Pressure Regulator specification:
 Type: Straight-through casting ball valve
 Nominal diameter: DN15 ~ 100
 Nominal pressure: PN16
 Connection type: flange type PN16 convex surface
 Body and bonnet material: WCB (SCPH2)
 CF8(304)CF8M(316)

Internal material: CF8 (304) CF8M (316)
 Applicable temperature: -40 ~ 230°C
 Filling: V-type PTFE
 Spool type: single seat plunger type spool
 Flow characteristics: quick opening
 Sealed version: soft seal
 Type: film type
 (100, 280 signal actuator)

Signal interface: internal thread M10×1
 Ambient temperature: -40 to +70 °C
 Valve function: Type B and Type K
 Type B spool initial position is normally open, closed when differential pressure increases
 K type spool initial position is normally closed, open when differential pressure increases

ZZVP Self Operated Micro Pressure Regulator Flow coefficient CV value and stroke:

DN(mm)	20	25	32	40	50	65	80	100	125	150	200	250	300
CV	7	11	20	30	48	75	120	190	300	480	760	1100	1750
Rated stroke (mm)	8	8	10	10	14	20	20	25	40	40	50	60	70