




UNI090009

Stainless Steel 2 Piece Ball Valve c/w Operating Lever

Flanged ANSI 150

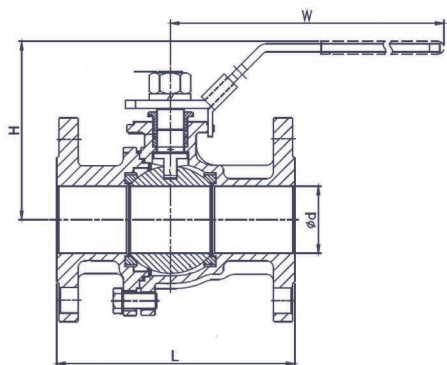

A versatile and robust two piece stainless steel ball valve suitable for a wide range of isolation applications.

The quarter turn operation in conjunction with the PTFE seats provides fast positive isolation.

This valve can be locked in either the open or closed position.

Approvals, Features & Benefits

- Face to face: ASME B16.10
- Blow out proof stem
- Lockable device when lever is fitted
- Full bore

Pressure & Temperature

- Pressure range :
- Max. 20 bar (12 bar for steam)
- Temperature range*:
- 20 °C to 200 °C
- * Dependent on pressure

DN	15	20	25	32	40	50	65	80	100	125	150	200	250
L	108	117	127	140	165	178	190	203	228.5	356	394	457	533
W	169	169	205	205	266	266	298	390	390	743	743	840	1040
H	85.7	88.5	103.3	108	128.4	135.9	147.6	167.5	182.5	239.6	256.5	334	378
d	15	20	25	32	38	50	65	80	100	125	150	200	250
Weight Kg	2.5	3	4	7	10	20	27	53	98				

MATERIALS	
Body	Stainless Steel (CFM8)
Ball (DN15 100)	Stainless Steel (CFM8)
Ball (DN125 250)	Stainless Steel (316)
Seats	PTFE
Stem	Stainless Steel (316)